


## Room 1

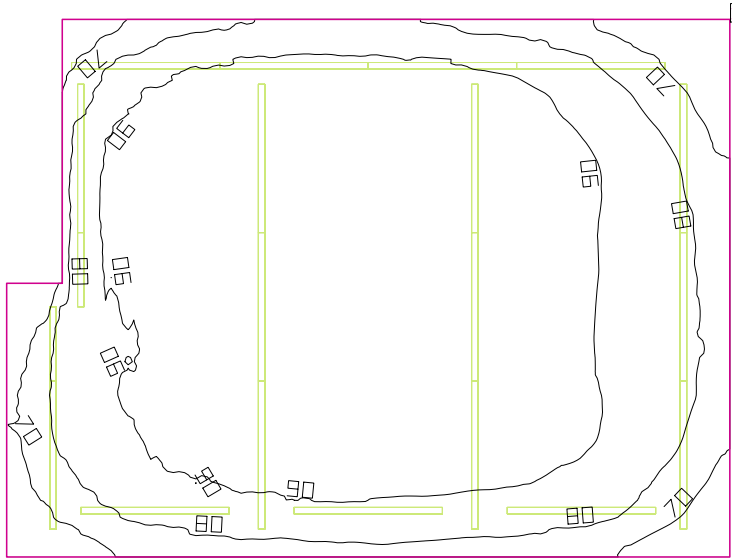

Height of room: 12.250 ft, Height of working plane: 2.625 ft, Wall zone: 0.000 ft  
 Reflection factors: Ceiling 70.0%, Walls 50.0%, Floor 20.0%, Light loss factor: 0.80

### Workplane

Surface	Result	Mean (target)	Min	Max	Mean/Min	Max/Min
1 Workplane 1	Perpendicular illuminance [fc]	88 (46)	49	102	1.796	2.082

No.	Quantity			
1	2	Lithonia Lighting C 2 32 GENERAL PURPOSE STRIP, 4FT LONG, WITH TWO LAMPS Light output ratio: 92.47% Lamp luminous flux: 5800 lm Luminaire Luminous Flux: 5363 lm Power: 58.0 W Light yield: 92.5 lm/W	See our luminaire catalog for an image of the luminaire.	
2	18	Lithonia Lighting TC 2 32 TANDEM GENERAL PURPOSE STRIP, 4FT LONG, WITH FOUR LAMPS Light output ratio: 92.86% Lamp luminous flux: 11600 lm Luminaire Luminous Flux: 10772 lm Power: 112.0 W Light yield: 96.2 lm/W	See our luminaire catalog for an image of the luminaire.	

Total lamp luminous flux: 220400 lm, Total luminaire luminous flux: 204622 lm, Total Load: 2132.0 W, Light yield: 96.0 lm/W

Lighting power density: 1.96 W/sq ft = 0.21 W/sq ft/10 fc (Ground area 1088.32 sq ft)